
Pamphlet accompanies map

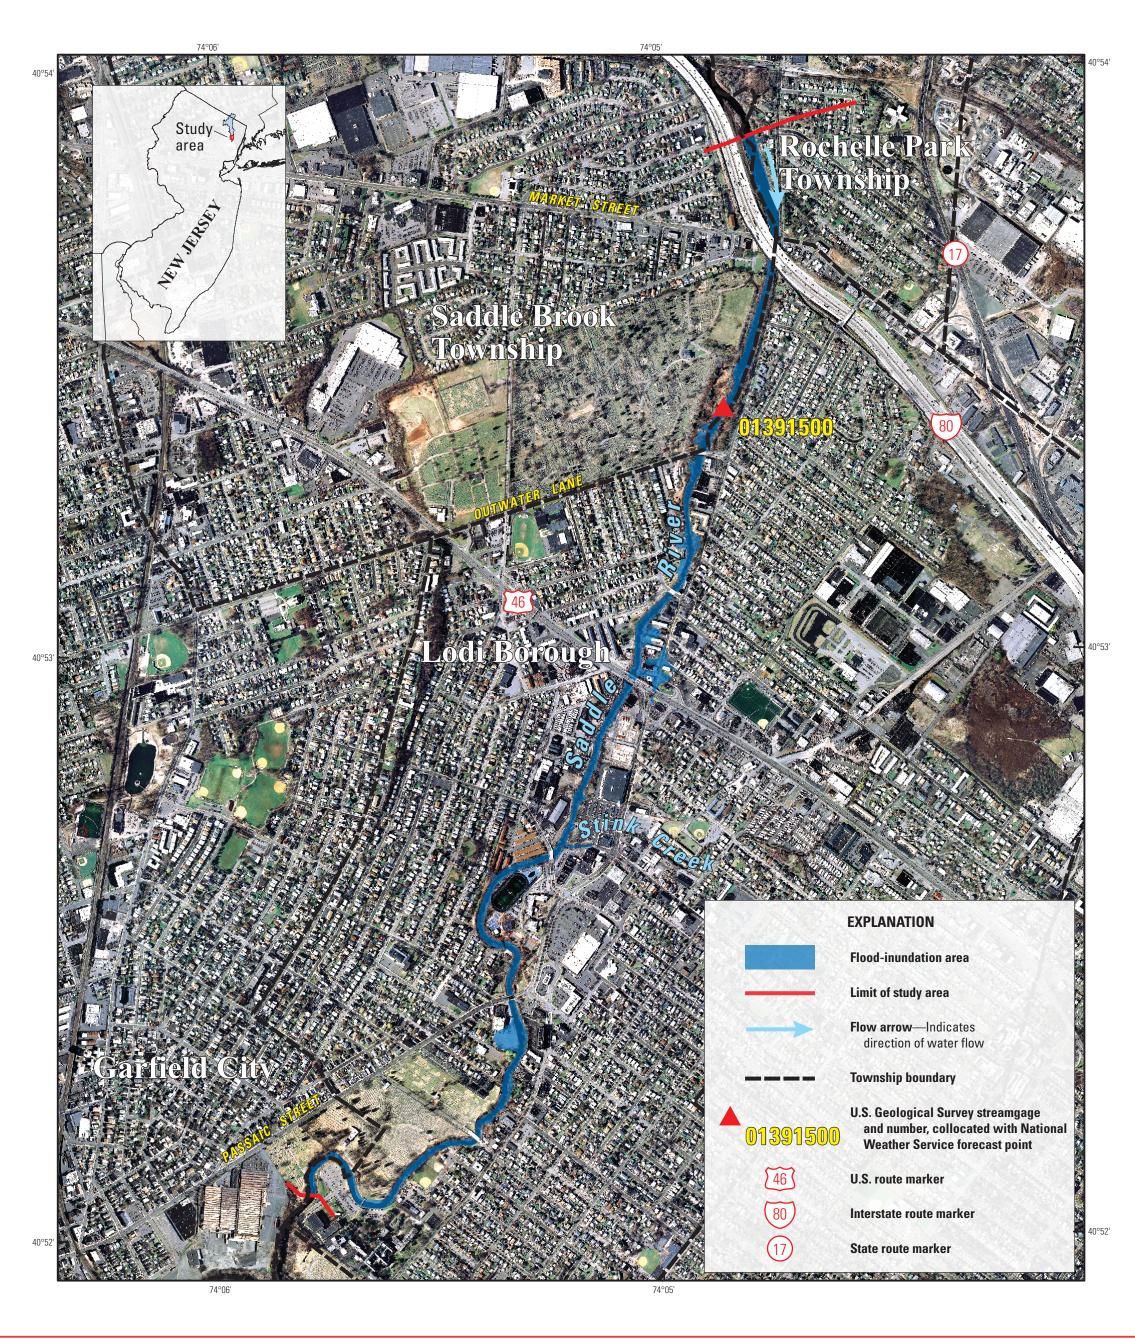


UNCERTAINTIES AND LIMITATIONS FOR USE OF FLOOD-INUNDATION MAPS

Although the flood-inundation maps represent the boundaries of inundated areas with a distinct line, some uncertainty is associated with these maps. The flood boundaries shown were estimated by steady-state hydraulic modeling, assuming unobstructed flow, and using streamflows and hydrologic conditions anticipated at the USGS streamgage(s). The hydraulic structures existing as of September 2004. Unique meteorological factors (timing and distribution of precipitation) may cause actual streamflows along the modeled reach to vary from those assumed during a flood, which may lead to deviations in the water-surface elevations and inundation boundaries shown. Additional areas may be flooded due to unanticipated conditions such as: changes in the streambed elevation or roughness, backwater into major tributaries along a main stem river, or backwater from localized debris or ice jams. The accuracy of the floodwater extent portrayed on these maps will vary with the accuracy of the digital elevation model used to simulate the land surface. Additional uncertainties and limitations pertinent to this study are described in the document accompanying this set of flood inundation map plates.

If this series of flood-inundation maps will be used in conjunction with National Weather Service (NWS) river forecasts, the user should be aware of additional uncertainties that may be inherent or factored into NWS forecast procedures. The NWS uses forecast models to estimate the quantity and timing of water flowing through selected stream reaches in the United States. These forecast models (1) estimate the amount of runoff generated by precipitation and snowmelt, (2) simulate the movement of floodwater as it proceeds downstream, and (3) predict the flow and stage (water-surface elevation) for the stream at a given location (AHPS forecast point) throughout the forecast period (every 6 hours and 3 to 5 days out in many locations). For more information on AHPS forecasts, please see: http://water.weather.gov/ahps/pcpn_and_river_forecasting.pdf.

DISCLAIME

Inundated areas shown should not be used for navigation, regulatory, permitting, or other legal purposes. The USGS provides these maps "as-is" for a quick reference, emergency planning tool but assumes no legal liability or responsibility resulting from the use of this information.

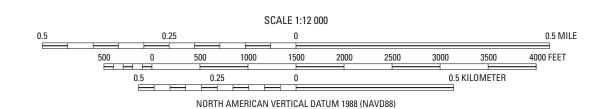

Flood-Inundation Map for the Saddle River from Rochelle Park to Lodi, New Jersey Corresponding to a Gage Height of 7.0 Feet and an Elevation of 31.0 Feet at the U.S. Geological Survey Streamgage 01391500 Saddle River at Lodi, New Jersey

Base from U.S. Geological Survey digital data North American Datum of 1983 (NAD 83)

Position of boundary on this map is approximate and for informational purposes only.

Suggested citation:
Hoppe, H.L. and Watson, K.M., 2012, Flood-inundation maps for the Saddle River from Rochelle Park to Lodi, New Jersey: U.S. Geological Survey Scientific Investigations Map 3221, 7 p. pamphlet, 11 sheets, scale 1:12 000.

By Heidi L. Hoppe and Kara M. Watson 2012 Publishing support provided by:
West Trenton Publishing Service Center
Manuscript approved for publication June 2012
For more information concerning

this publication, contact:
Director, New Jersey Water Science Center
U.S. Geological Survey
810 Bear Tavern Road, Suite 206
West Trenton, NJ 08628
(609) 771–3900

http://www.usgs.gov/ 1–888–ASK–USGS

Or visit the New Jersey Water Science Center Web site at: http://nj.usgs.gov/
This report is available at: http://pubs.usgs.gov/sim/3221/.

Any use of trade, product, or firm names is for descriptive purposes only and does not imply endorsement by the U.S. Government.

This and other USGS information products are available at: http://store.usgs.gov/
U.S. Geological Survey, Box 25286
Denver Federal Center, Denver, CO 80225

To learn about the USGS and its information products visit